




Dog-Friendly  
Pens




Ax14




Bx5

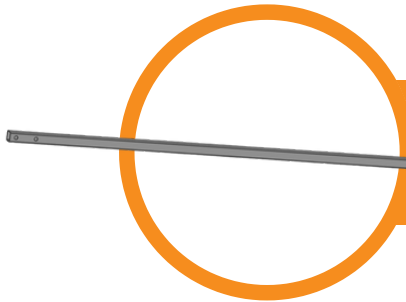


Cx10

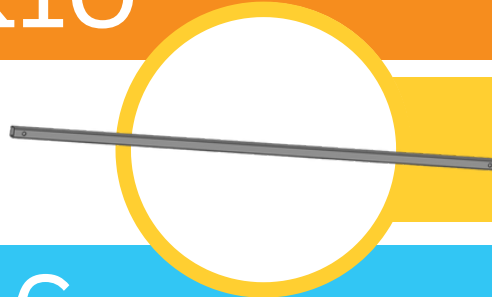


Dx15

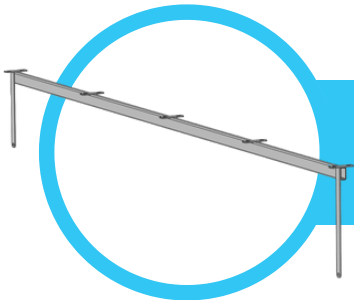


Ex6



Fx13




Gx1

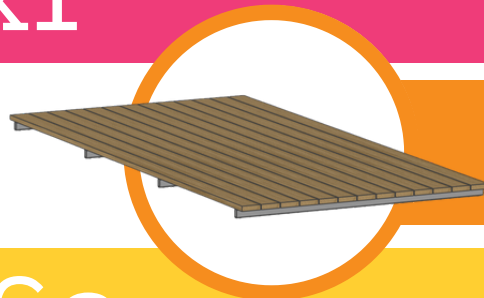

Hx5



Ix60



Jx28

LILI LIGHT Pen  
SIZE:






Kx38



Lx28



Mx50

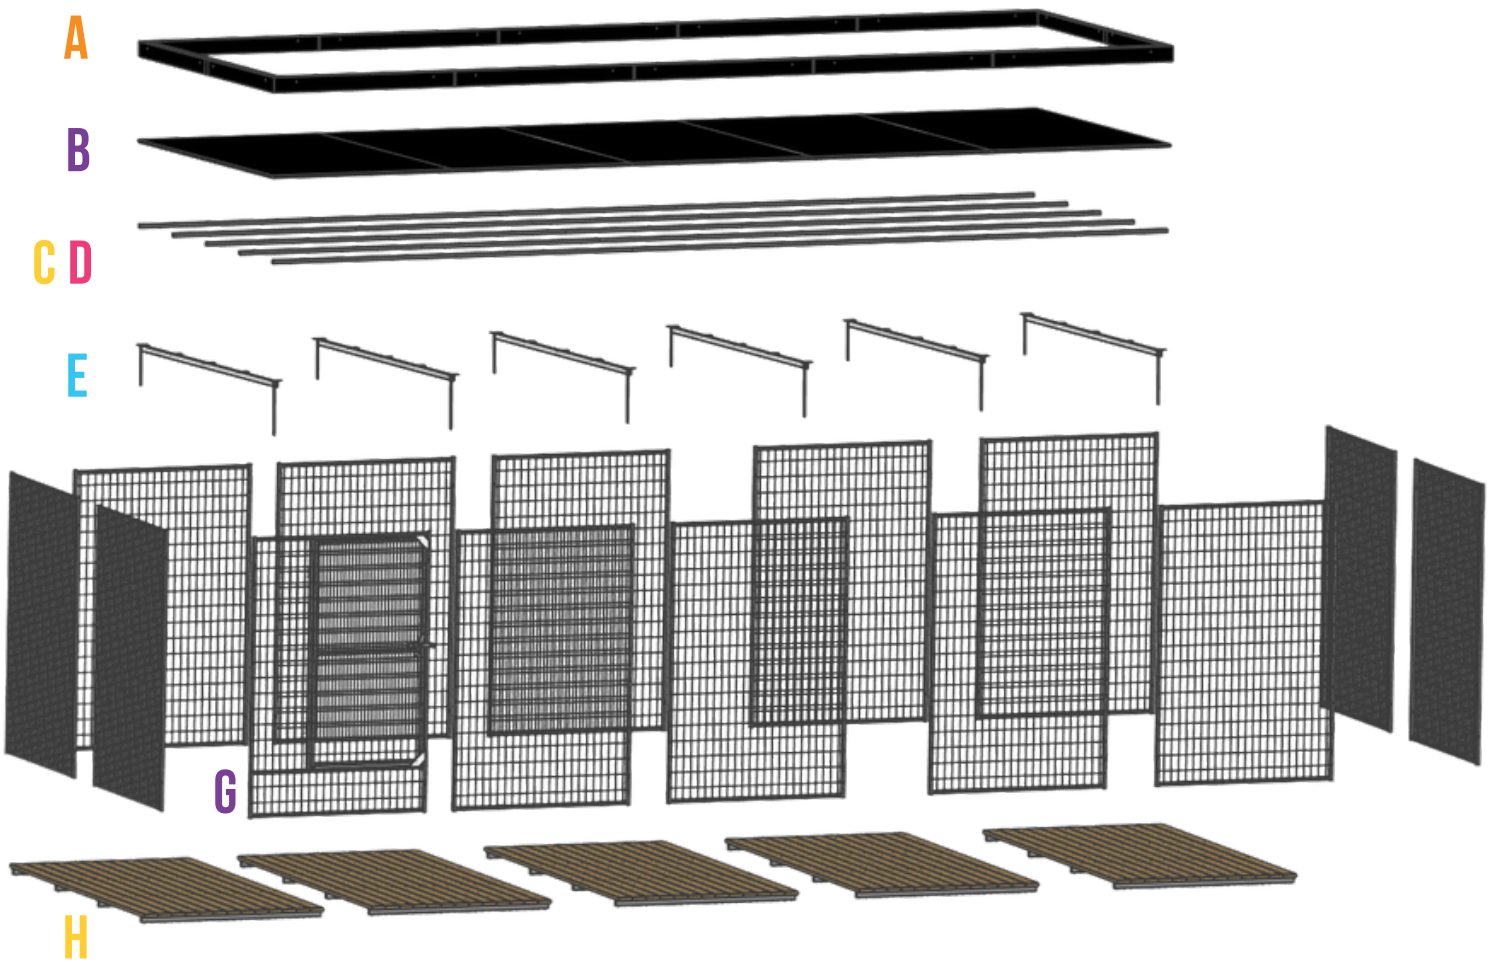

13MM




5MM






LILI LIGHT Pen  
SIZE:





Podłoże powinno być wyziomowane

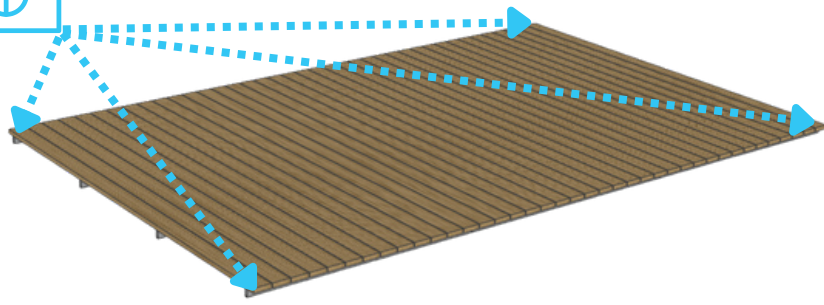


<sup>H</sup>  
**1**

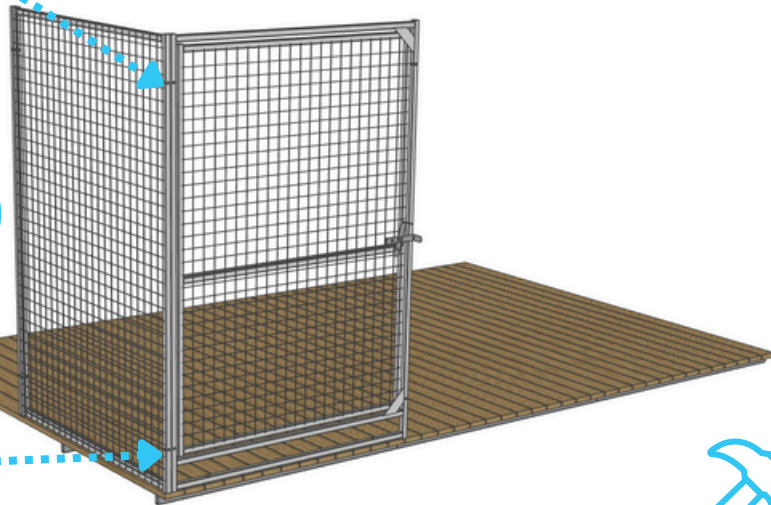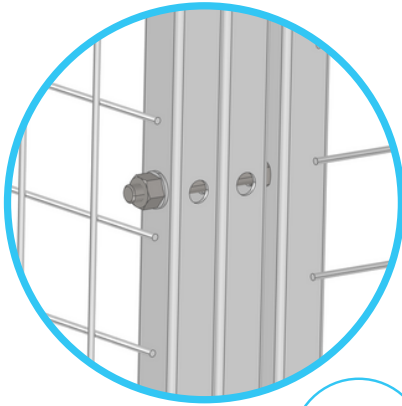



<sup>FGJ</sup>  
**2**

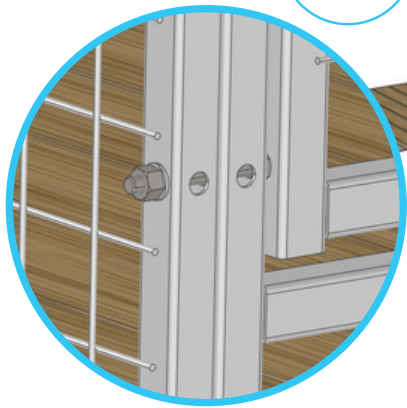


xFL

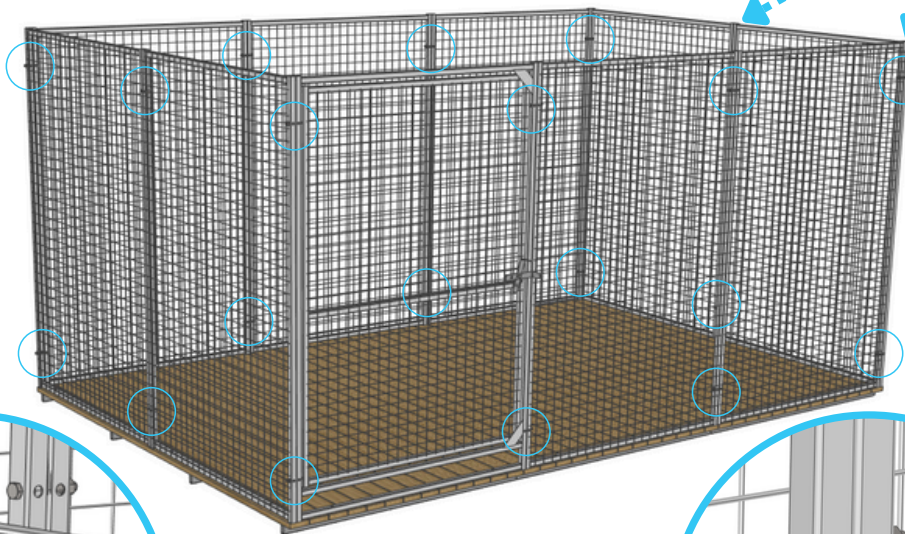


<sup>FJ</sup>  
**3**

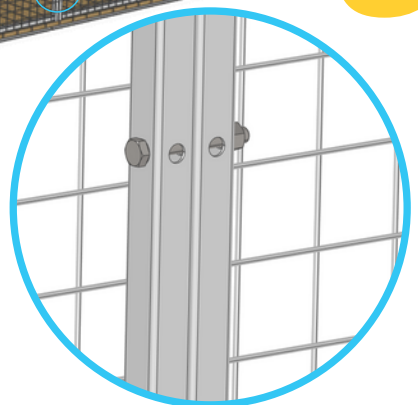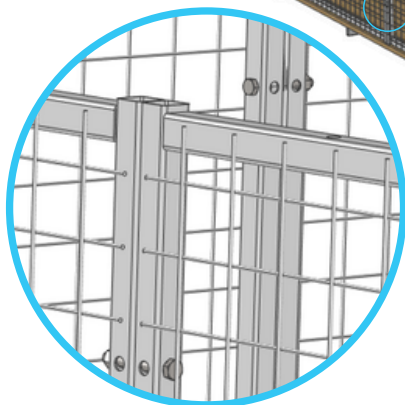




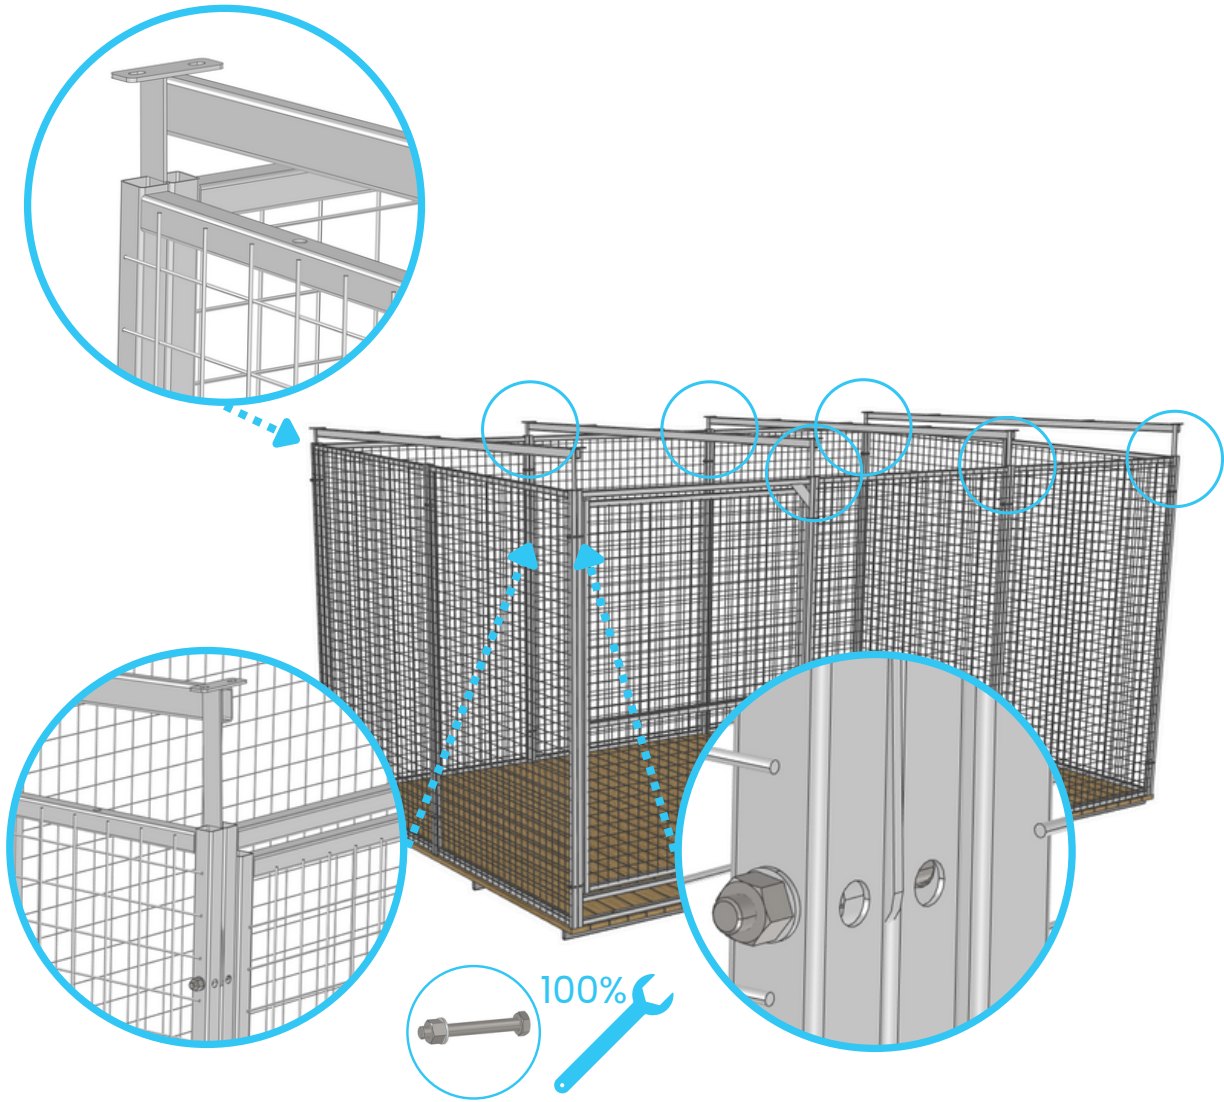


4<sup>EJK</sup>

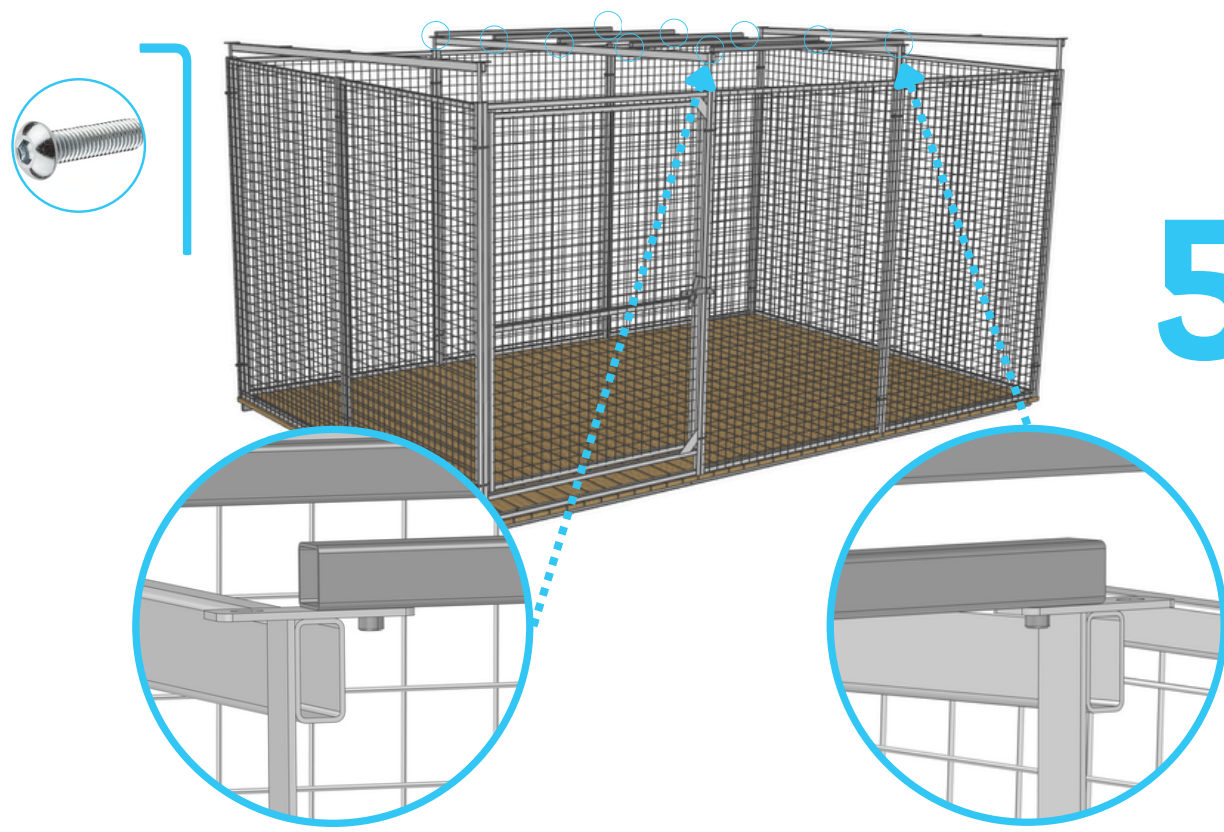


5<sup>DI</sup>

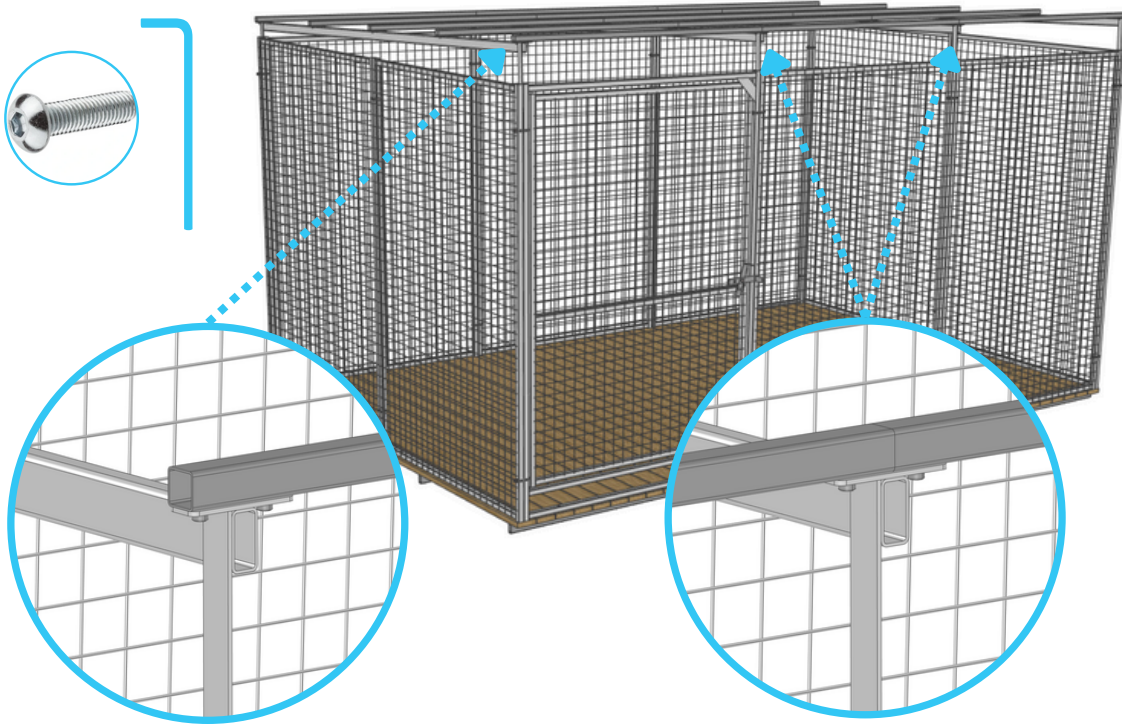

6<sup>CI</sup>

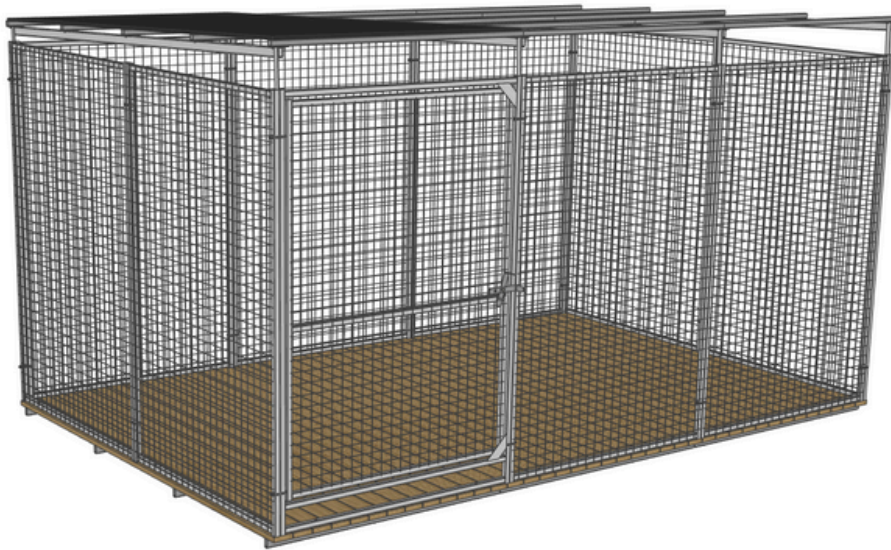


7<sup>B</sup>

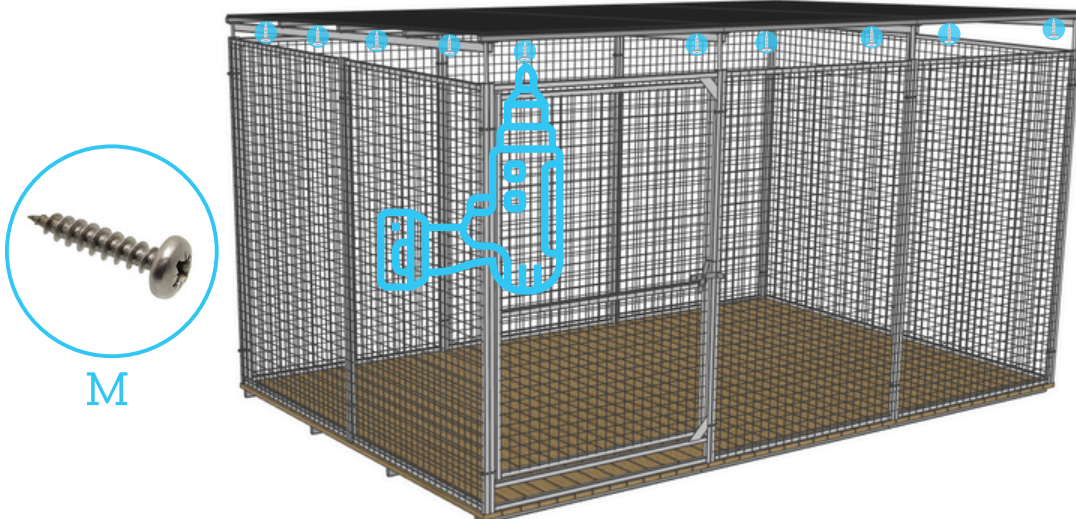


8<sup>B</sup>



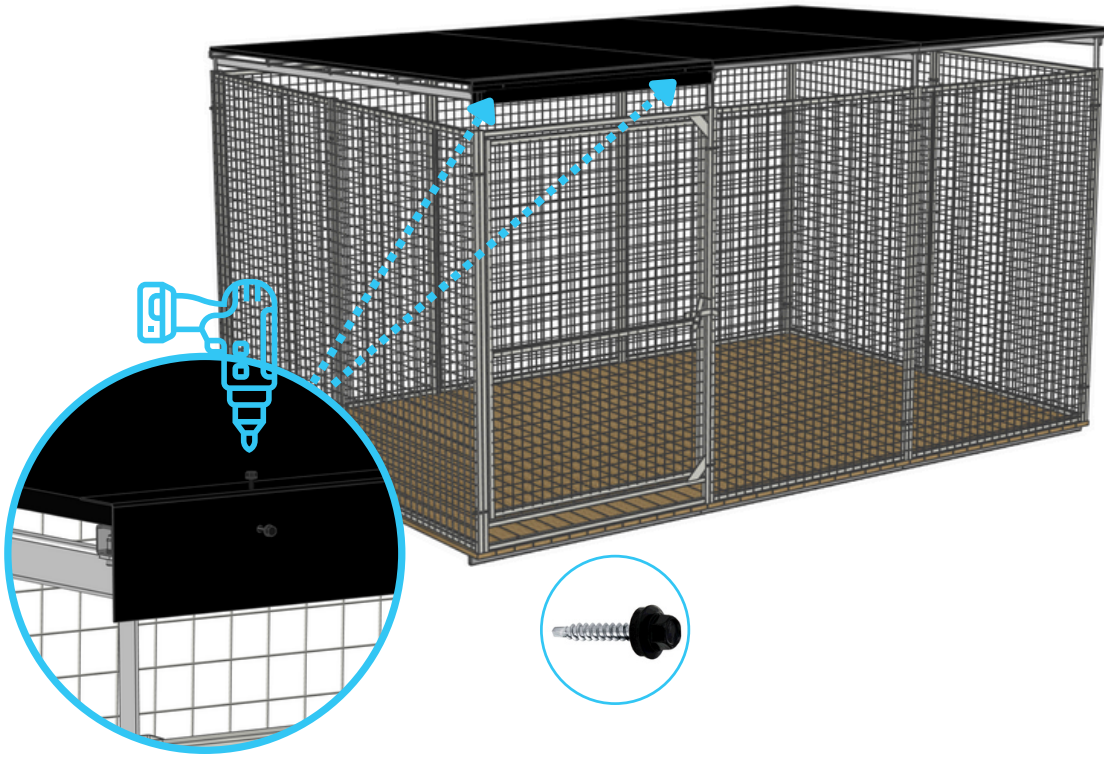

9<sup>AL</sup>

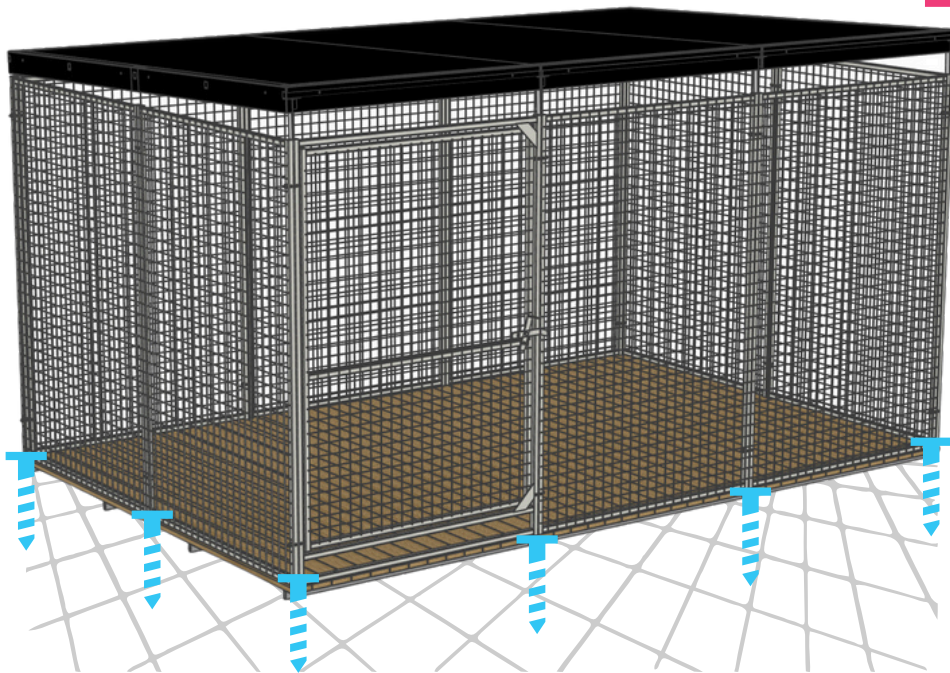

10<sup>AK</sup>

## **Maintenance and Cleaning**

Before beginning maintenance, ensure you have the proper tools (e.g., a spray bottle, soft cleaning cloth) and personal protection equipment, especially gloves.

### **Galvanized panels:**

- 1.** We recommend adjusting the cleaning frequency of the pen panels based on how quickly they accumulate dirt. Surface contamination, especially with biological materials, affects the time before corrosion occurs and shortens the product's lifespan
- 2.** Use cleaners with a neutral pH and only soft materials for cleaning. Do not use aggressive acid- or base-based cleaners or organic solvents.
- 3.** The use of a pressure washer is permitted, but maintain an appropriate distance from the nozzle to the cleaned elements.
- 4.** During the cleaning of the pen panels, pay attention to any damage to the galvanized surface and repair it using high-zinc paint according to the paint manufacturer's instructions.

### **Flooring:**

- 1.** Continuously remove faeces, food residue, plants, and soil from wooden elements. Periodically, depending on the speed of dirt accumulation, wash the entire floor with mild cleaners (e.g., grey soap) and a brush. More stubborn stains can be removed with a pressure washer.
- 2.** At least once a year (we recommend twice), wash, dry, and sand the floor with sandpaper from grit P40 to P80, then oil the surface.